



www.canamequipment.com

CanAm

Equipment Solutions
403-454-2720

1680 PNEUMATIC



BEALL PNEUMATIC


sales@canamequipment.com

Designed primarily to haul fly ash, soda ash, and plastic pellets, the 1680 4-hopper is the lightest pneumatic in the industry. Innovative design plus all-aluminum construction are the keys. The "R" model features a round rather than elliptical cross section, with several resulting benefits: reduced flexing of the trailer, enhanced work life, and fewer maintenance issues. Unlike the elliptical cross section of our competitor's model, which is always trying to become round, the Beall trailer is built round.





www.canamequipment.com

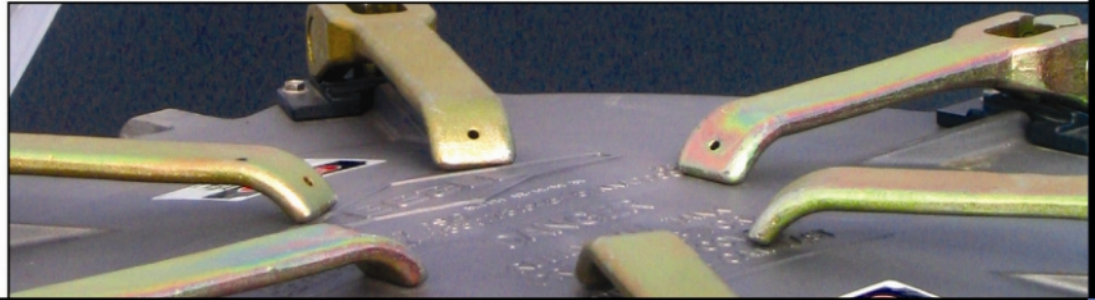

GENERAL CONSTRUCTION | TANK FITTINGS | DISCHARGE | LOADING FITTINGS | TRIM | SUSPENSION | ELECTRICAL SYSTEM | FINISH

CAPACITY:	1680 Cubic Foot
SHELL:	5454-H32 Buffed Aluminum
WIDTH:	102"
TOE RAILS:	6061-T6 Extruded Aluminum Full Length Each Side
HEADS:	5454-0 Buffed Aluminum
AERATION:	(3) Flow Cones Per Hopper (4) 2" Brass Control Valves Hopper Savers on Lower Hopper
AIR SUPPLY:	3" Line Teed for Discharge, Top Air, and Aeration
BLOW DOWN:	2" Line at Streetside Front with (1) 2" Butterfly Valve and (1) 2" Pop-Off Valve Set at 15 PSI
TOP AIR:	2" Line with (1) 2" Butterfly Valve Off Air Supply
DISCHARGE VALVES:	(4) 5" Butterfly Valves with 18" Extension Handles
MANHOLE:	(4) 20" Opening Away from Ladder at 45 Degree to Curbside Delrin Wear Pads on Cam Lug Contact Areas Rubber Bumper Pads
DISCHARGE:	(4) 4" x 5" x 4" LP Aluminum Tees and 4" Sch 40 Aluminum Pipe to Rear Hopper with 45 Degree Steel Elbow to Streetside with 4" Male Coupler and Cap
CATWALK:	Non-Skid Tape Between Aluminum Extruded Toe Rails
LADDER:	Aluminum at Rear With Non-Slip Steps
FENDERS - FRONT:	Full Aluminum with Rear Flaps and 8" Front Flaps
FENDERS - REAR:	Full Aluminum with Flaps
PRESSURE GAUGES:	Liquid Filled (1) 0-30 PSI Tank and (1) 0-30 PSI Line with Light
BLOWER HOSE:	3" X 12' with 3" Female Couplers Each End Transport Hook and Dummy Coupler
HOSE TUBES:	(1) 8" X 21' 0" Aluminum Streetside Rear, Rear Door
BUMPER:	Standard Aluminum Cosmetic Bumper
LANDING GEAR:	Two Speed with Sand Shoes, Streetside Crank
SUSPENSION:	(2) Hendrickson 23,000# INTRAAX AANT with Air Springs
HUBS:	(4) Conmet Aluminum
ABS / BRAKE SYSTEM:	Haldex PLC Select ABS
WHEELS:	(8) 8.25 X 22.5 Aluminum
TIRES:	(8) 11R22.5 (14 Ply) Michelin XT-1
TAIL LIGHTS:	Trucklite LED Tail and Marker Lights, (3) Tail Lights Per Side with Center Amber Turn
MARKER LIGHT:	(3) Marker Lights Per Side Center Marker Lights Flash with Turn Signal
CENTER STOP LIGHT:	(1) Center High Mount Stop Light
PAINT:	Steel Parts Primed and Painted Black Polyurethane
EST. TARE WEIGHT:	9,600# +/- 3%



BEALL PNEUMATIC • 1680

sales@canamequipment.com

*ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Sales: 403-454-2720

